


AS-100


3Ph or 1Ph - MLS Mechanical 3 Wire Limits

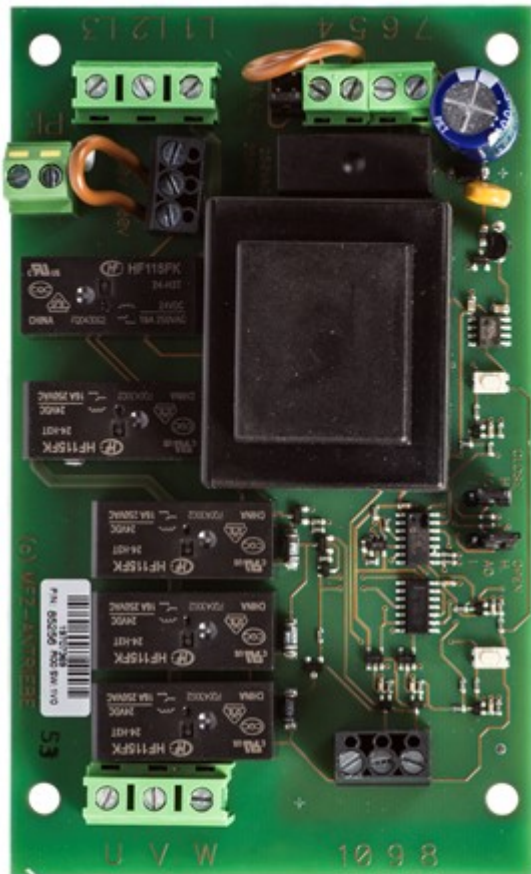

The AS 100 is a basic control panel that offers an effective way of applying simple door functions using deadman operation. The control panel is most suitable for simple open and close commands and is an inexpensive alternative to control panels that run automatic roller shutters or sectional doors. The control panel can be either installed directly to motor, reducing cabling and assembly installation or within an IP54 enclosure if necessary.

Features

- Supply selection between 400v 3ph or 230v 1ph
- Pluggable terminal connections (screw)
- Deadman control
- Cable connection block for external 3-button input unit
- “Close” running direction without maintained command
- “Open” running direction with or without
- Mechanical limit connection

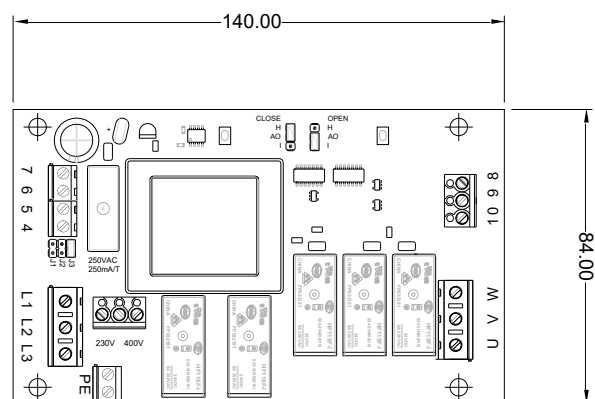

Operating Voltage	Mains Frequency	Control Voltage (mA)	Maximum Load (kW / A)	Protection Grade	Temperature range
400/3~ : 230/1~	50 Hz	24v (150)	1.1 / 4	IP 54	-10 / +60

Please Contact Our Sales Department On 01928 579050 For Further Information