


## CDO 100 1PH & 3PH

Roller Shutter Operator

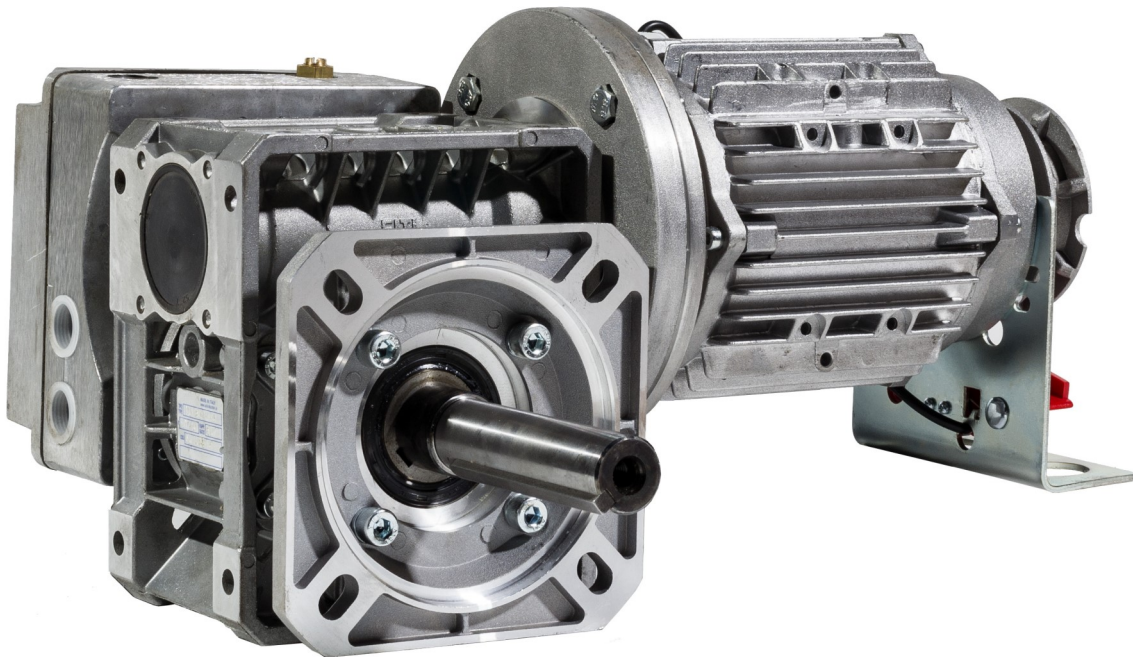

- \* Available with pre-wired starter.
- \* Safety Interlock Switch for manual operation.
- \* Integral Thermal Protection.
- \* 1" industry standard output shaft.
- \* IP 54 Environment Protection.
- \* Gear driven Limit Switches.
- \* Phosphor bronze Worm Wheel.
- \* Handing can be changed on site to suit the installation.
- \* Available with a variety of manual operating systems.
- \* Developed to make installation easy and simple.
- \* Option for foot mounting (without flange & with 50mm long output shaft).

**Please Contact Our Sales Department On 01928 579050 For Further Information**

The CDO-100 rolling door flangemount operator has a 0.37kW single phase or 0.75kW three phase unbraked motor.

These models are available with Hand Crank (HCR), High Level Hand Chain (WGI) or Floor Level Hand Chain (KE) systems which enable the roller shutter door to be manually opened & closed when required.

Type	CDO-100 c/w Hand Crank	CDO-100 c/w Floor Level Hand Chain	CDO-100 c/w High Level hand Chain
<b>Data</b>			
Power (kW)	0.37 (1ph) or 0.75 (3ph)		
Torque (Nm)	90 (1ph) or 135 (3ph)		
Output Speed (R.P.M.)	24		
Number of Turns	40		
IP Rating	I.P.54		
Current (Amps)	2.50 (1ph) or 1.85 (3ph)		
Power Supply	230v / 1ph / 50Hz or 400v / 3ph / 50Hz		

### DIMENSIONS: CDO-100 3ph c/w High Level Hand Chain

