


CDO-200

Flangemount | Roller Shutter Operator

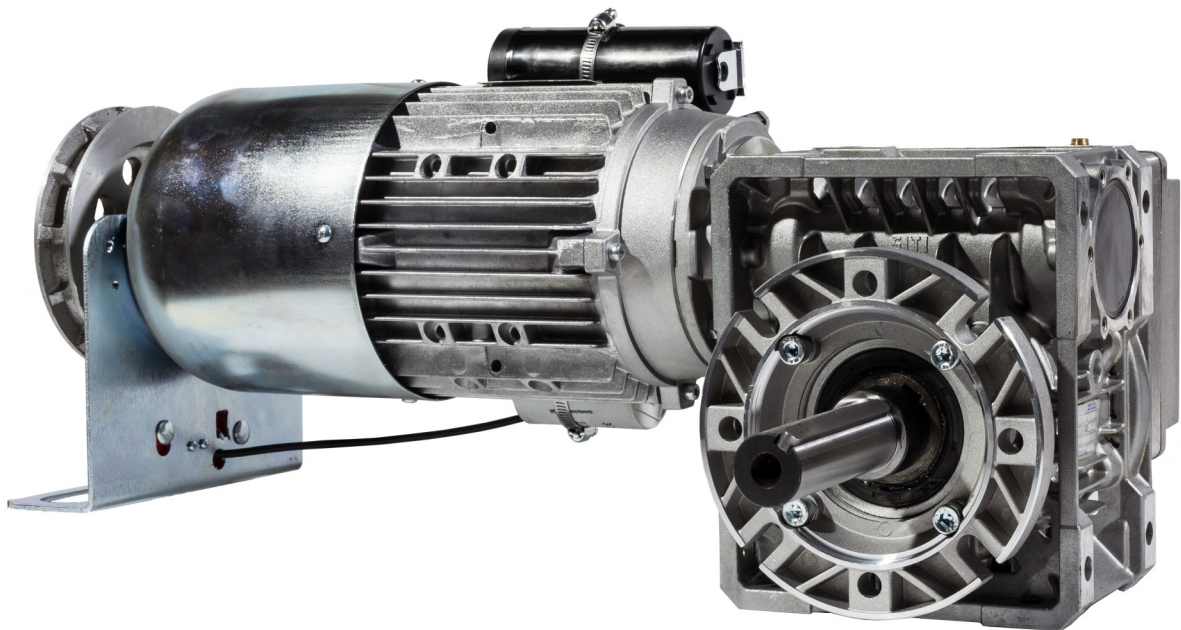

OPERATOR FEATURES

- * Safety interlock switch for manual operation.
- * Integral thermal protection.
- * 30mm dia. industry standard output shaft.
- * IP54 environment protection.
- * Gear driven limit switches.
- * Phosphor bronze worm wheel.
- * High starting torque industrial duty motor.
- * Integral parking brake.
- * Option for footmounting (without flange & with 50mm long output shaft).
- * KE Floor level handchain override system available.

Please Contact Our Sales Department On 01928 579050 For Further Information

The CDO-200 Rolling Door Operator is available with 1.5kw, 400v Three Phase Brake Motor or 0.75kw, 230v Single Phase Motor. These models can be fitted with a Hand Crank (HCR), High Level Hand Chain (WGI) or Floor Level Hand Chain (KE) System which enables the roller shutter door to be manually opened & closed when required.

Data	Type	CDO-200 3PH c/w Hand Crank	CDO-200 3PH c/w High Level Hand Chain / KE	CDO-200 1PH c/w High Level Hand Chain	CDO-200 HD 3PH c/w KE Override
Power (kW)		1.5	1.5	0.75	1.5
Torque (Nm)		285 / 175	285 / 175	200	245
Output Speed (R.P.M.)		24 / 45	24 / 45	24	45
Environmental Protection		I.P.54	I.P.54	I.P.54	IP.54
Current (Amps)		3.2	3.2	5.2	3.6
Power Supply		400v/3ph/50Hz	400v/3ph/50Hz	230v/1ph/50Hz	400V/3ph/50Hz

OPERATOR DIMENSIONS:- CDO-200 3ph c/w High Level Hand Chain & CDO 200 HD 3ph c/w KE Override

