


CDO 100B Compact Roller Shutter Operator

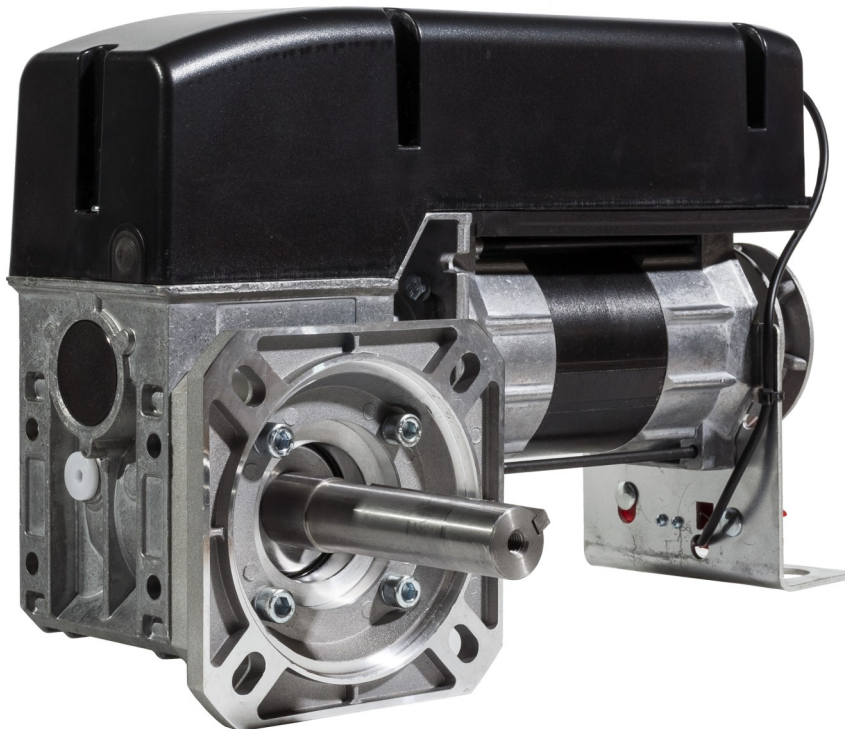

Features


- * Available with pre-wired starter.
- * Available with a variety of manual operating systems.
- * 1" industry standard output shaft.
- * Handing can be changed on site to suit the installation.
- * Developed to make installation easy and simple.
- * Integral Thermal Protection.
- * IP 54 Environment Protection.
- * Gear driven Limit Switches.
- * Phosphor bronze Worm Wheel.

Please Contact Our Sales Department On 01928 579050 For Further Information

The CDO-100B COMPACT door operator has a 0.55kW, 400V three phase motor. Alternatively, a 0.3kW, 240V single phase version is available. These models are available with either a High Level or Floor Level Hand Chain System, which can enable the roller shutter door to be manually opened & closed when required. Available with pre-wired Starter. Developed to make installation easy and simple.

Data	Type	1ph CDO 100B Compact HCR/WGI/FLM	3ph CDO 100B Compact HCR/WGI/FLM
Power (kW)		0.3	0.55
Torque (Nm)		65	100 (140 Peak)
Output Speed (R.P.M.)		24	24 / 30 / 45
Number of Turns		38 / 22	38
IP Rating		I.P.54	I.P.54
Current (Amps)		4.5	1.8
Power Supply		240V/1ph/50Hz	400V/3ph/50Hz

Product Dimensions - CDO100B 3PH 0.55kW WGI

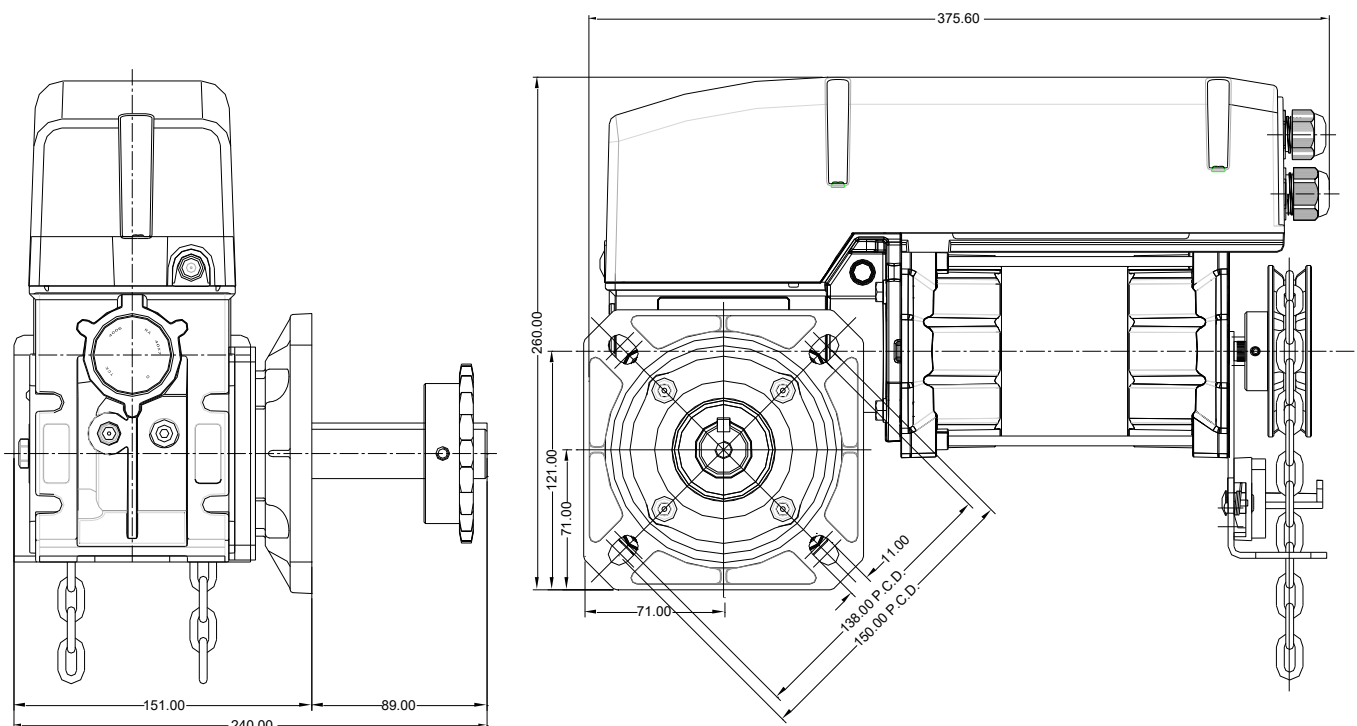

Please Contact Our Sales Department On 01928 579050 For Further Information