


TVRFC

Sliding / Folding Door Operators

Footmounted Operators for Sliding Doors.

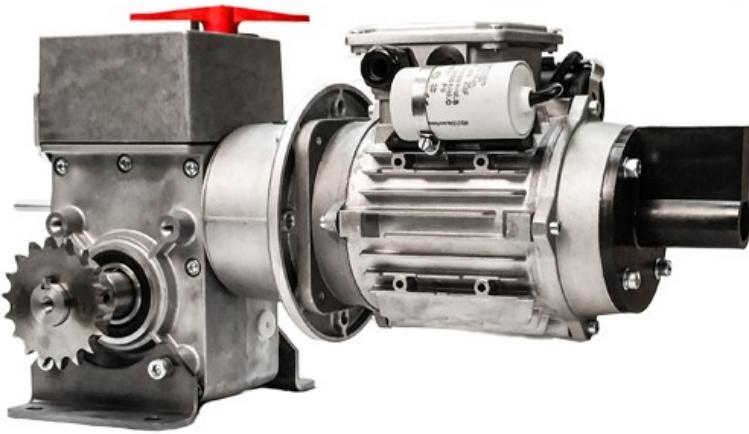

- * Integral Slipping Clutch
- * Integral Thermal Protection.
- * I.P. 54 Environment Protection.
- * Phosphor Bronze Worm Wheel.
- * High starting Torque-Industrial Duty Motor.
- * Industry Standard 1" Hollowbore.
- * Disengage Clutch for Simple Emergency Operation

The TVRFC Sliding Door Operator is available in 230V Single phase 0.37 kW & 400V Three phase 0.55 & 0.74 kw power sizes, These models are fitted with a Disengage Clutch which enables the sliding door to be manually operated when required. An Adjustable Slipping Clutch is provided for additional protection and safety

Data	Type	TVRFC-50	TVRFC-50/1	TVRFC-100
Power (kW)		0.37	0.55	0.74
Output Speed (R.P.M.)		45	45	45
Environmental Protection		I.P.54	I.P.54	I.P.54
Current (Amps)		2.57	2.0	3.1
Power Supply		230v/1ph/50Hz	400v/3ph/50Hz	400v/3ph/50Hz

Please Contact Our Sales Department On 01928 579050 For Further Information